


Kniptang
 automatisch
 rond
 enkelwerkend

Nipper
 automatic
 round
 single acting

501



500

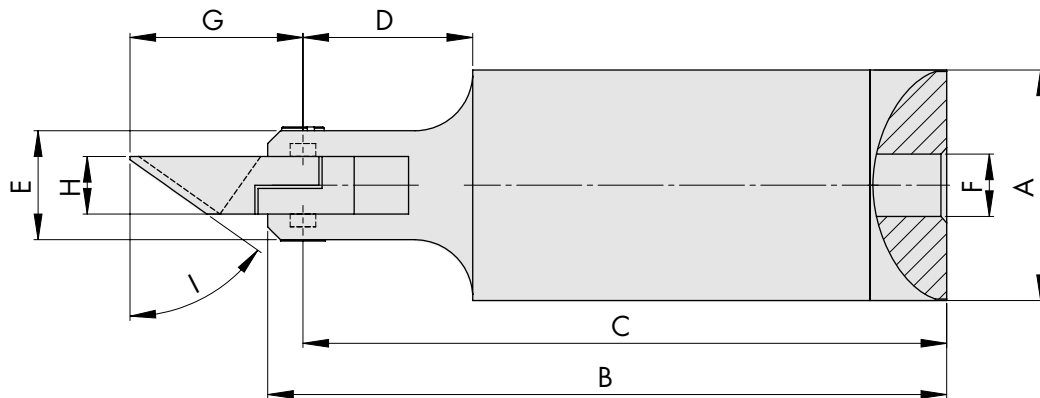

| Artikel - Nr. Article - No. | A | B | C | D | E | F |
|--------------------------------------|----|-----|-----|----|----|-----|
| exclusief snijbekken / without blade | | | | | | |
| 501 30 000 | 36 | 105 | 98 | 24 | 17 | 1/4 |
| 501 40 000 | 45 | 121 | 113 | 22 | 23 | 1/4 |
| 501 50 000 | 56 | 157 | 147 | 40 | 30 | 1/4 |
| 501 70 000 | 76 | 173 | 164 | 23 | 31 | 1/4 |

| Artikel - Nr. Article - No. | G | H | I | Ø | Gewicht € Weight € |
|--|----|----|----|----|-----------------------|
| inclusief standaard snijbekken 30° (40°) / with standard-blade 30° (40°) | | | | | |
| 501 30 040 | 27 | 9 | 40 | 3 | 210 g |
| 501 40 040 | 35 | 12 | 40 | 7 | 390 g |
| 501 50 030 | 59 | 17 | 30 | 11 | 870 g |
| 501 70 030 | 59 | 17 | 30 | 16 | 1400 g |

Toepassing

- Voor het automatisch verwijderen van aansputtingen.
- Ø = Snijkracht

Application

- Nippers for gate cutting.
- Ø = Closing torque

Rokoma B.V.

Postbus 14, 5500 AA Veldhoven, NL
 Ambachtsweg 22, 5683 CD Best, NL

Tel.: +31 (0)40 22 65 655
 Fax: +31 (0)40 22 65 515

info@rokoma.nl
 www.rokoma.nl



© Rokoma