


Zuignapvinger  
verend  
met schroefdraad

Gripper arm  
spring-loaded  
with insert nut



303

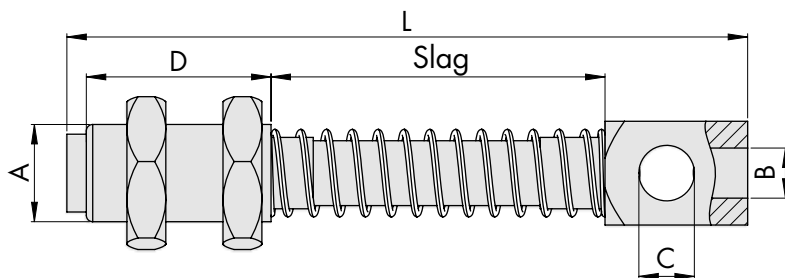

300

Artikel - Nr. Article - No.	A	B	C	D	L	Slag Stroke	SW AF	Gewicht Weight
303 11 210	M 10 x 1	M 5	M 5	26	58	10	17	25 g
303 11 220	M 10 x 1	M 5	M 5	26	76	20	17	27 g
303 42 215	M 14 x 1	1/8	1/8	32	80	15	22	90 g
303 42 235	M 14 x 1	1/8	1/8	32	105	35	22	93 g
303 43 215	M 14 x 1	1/4	1/8	32	82	15	22	97 g
303 43 235	M 14 x 1	1/4	1/8	32	107	35	22	100 g
303 62 215	M 16 x 1	1/8	1/8	32	80	15	24	91 g
303 62 235	M 16 x 1	1/8	1/8	32	105	35	24	94 g
303 63 215	M 16 x 1	1/4	1/8	32	82	15	24	98 g
303 63 235	M 16 x 1	1/4	1/8	32	107	35	24	101 g
303 32 220	M 20 x 1,5	1/8	1/8	53	109	20	30	171 g
303 32 240	M 20 x 1,5	1/8	1/8	53	135	40	30	183 g
303 33 220	M 20 x 1,5	1/4	1/4	53	113	20	30	168 g
303 33 240	M 20 x 1,5	1/4	1/4	53	139	40	30	177 g

#### Toepassing

- Verende zuignapvinger voor haakse contactvlakken t.o.v. de zuignap.
- Geschikt voor vlakke- en balgzuignappen.
- Verende slag geschikt voor het opvangen van verschillen tijdens ontvormen.

#### Application

- Spring-loaded gripper arm for rectangular contact surface to suction cup.
- Fitting for flat- and telescope suction cups.
- Fixation of bulkhead connector. Spring deflection is fitting for adjustment of differences in movement while demoulding.

Rokoma B.V.

Postbus 14, 5500 AA Veldhoven, NL  
Ambachtsweg 22, 5683 CD Best, NL

Tel.: +31 (0)40 22 65 655  
Fax: +31 (0)40 22 65 515

info@rokoma.nl  
www.rokoma.nl



© Rokoma