


Zuignapvinger
verend, niet verdraaibaar, met schroefdraad

Gripper arm
spring-loaded, secured against contortion, with insert nut

304

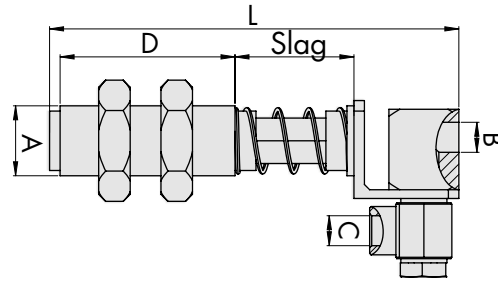

Artikel - Nr. Article - No.	A	B	C	D	L	Slag Stroke	SW AF	Gewicht Weight
304 11 210	M 10 x 1	M 5	M 5	26	62	10	17	29 g
304 11 220	M 10 x 1	M 5	M 5	26	80	20	17	30 g
304 42 215	M 14 x 1	1/8	1/8	32	80	15	22	71 g
304 42 235	M 14 x 1	1/8	1/8	32	105	35	22	72 g
304 43 215	M 14 x 1	1/4	1/8	32	87	15	22	76 g
304 43 235	M 14 x 1	1/4	1/8	32	112	35	22	77 g
304 62 215	M 16 x 1	1/8	1/8	32	110	15	24	76 g
304 62 235	M 16 x 1	1/8	1/8	32	105	35	24	77 g
304 63 215	M 16 x 1	1/4	1/8	32	87	15	24	81 g
304 63 235	M 16 x 1	1/4	1/8	32	112	35	24	82 g
304 32 220	M 20 x 1,5	1/8	1/8	53	117	20	30	145 g
304 32 240	M 20 x 1,5	1/8	1/8	53	143	40	30	146 g
304 33 220	M 20 x 1,5	1/4	1/4	53	119	20	30	168 g
304 33 240	M 20 x 1,5	1/4	1/4	53	145	40	30	169 g

Toepassing

- Verende zuignapvinger met zwenkbare kop voor schuine contactvlakken t.o.v. de zuignap.
- Geschikt voor vlakke- en balgzuignappen.
- De zuignap kan op schuine vlakken tot ca. 45° exact ingesteld worden.
- Verende slag geschikt voor het opvangen van verschillen tijdens ontvormen.

Application

- Gripper arm with rotatable head for askew contact surface to suction cup.
- Fitting for flat- and telescope suction cups.
- The suction cup can be adjusted accurately up to 45° onto the askew contact surface.
- Allows for mounting of bulkhead. Spring deflection is fitting for adjustment of differences in movement while demoulding.