


Zuignapvinger  
verend, niet verdraaibaar

Gripper arm  
spring-loaded, secured against contortion



304

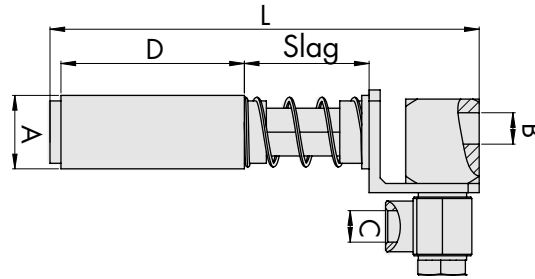

300

Artikel - Nr. Article - No.	A	B	C	D	L	Slag Stroke	Gewicht Weight
304 11 010	10	M 5	M 5	26	62	10	29 g
304 11 020	10	M 5	M 5	26	80	20	30 g
304 42 015	14	1/8	1/8	32	80	15	71 g
304 42 035	14	1/8	1/8	32	105	35	72 g
304 43 015	14	1/4	1/8	32	87	15	76 g
304 43 035	14	1/4	1/8	32	112	35	77 g
304 22 015	15	1/8	1/8	32	85	15	76 g
304 22 035	15	1/8	1/8	32	110	35	77 g
304 23 015	15	1/4	1/8	32	87	15	81 g
304 23 035	15	1/4	1/8	32	112	35	82 g
304 32 020	20	1/8	1/8	53	117	20	145 g
304 32 040	20	1/8	1/8	53	143	40	146 g
304 33 020	20	1/4	1/4	53	119	20	168 g
304 33 040	20	1/4	1/4	53	145	40	169 g

#### Toepassing

- Verende zuignapvinger met zwenkbare kop voor schuine contactvlakken t.o.v. de zuignap.
- Geschikt voor vlakke- en balgzuignappen.
- De zuignap kan op schuine vlakken tot ca. 45° exact ingesteld worden.
- Verende slag geschikt voor het opvangen van verschillen tijdens ontvormen.

#### Application

- Gripper arm with rotatable head for askew contact surface to suction cup.
- Fitting for flat- and telescope suction cups.
- The suction cup can be adjusted accurately up to 45° onto the askew contact surface.
- Spring deflection is fitting for adjustment of differences in movement while demoulding.

Rokoma B.V.

Postbus 14, 5500 AA Veldhoven, NL  
Ambachtsweg 22, 5683 CD Best, NL

Tel.: +31 (0)40 22 65 655  
Fax: +31 (0)40 22 65 515

info@rokoma.nl  
www.rokoma.nl



© Rokoma